


MODEL 120 MINICOLT

Wrap-Around Labeler

applying excellence



This affordable labeler offers superior reliability, a compact footprint, and user-friendly controls to provide easy installation and easy operation at speeds up to 100 containers per minute.

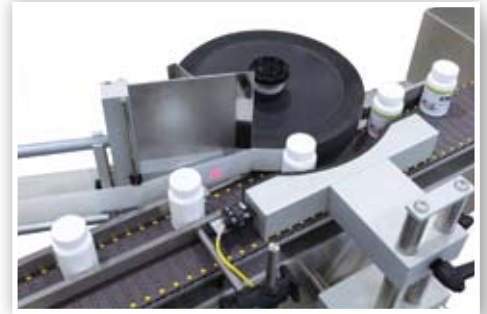

- Compact wrap-around labeler for round containers
- Optional 2 or 3 panel labeling of square and rectangular containers (straight sided only)
- Raised bed stainless steel conveyor
- Stepper-driven label dispenser
- PLC controls 
- User-friendly control panel
- 14" diameter label spool
- Drum wrap-around
- Speeds up to 100 cpm


powered by Pro Mach 

Model 120 MINICOLT Wrap-Around Labeler

Standard Features

- Allen Bradley PanelView 800
- Stainless steel construction
- Open-frame design
- Stainless steel raised-bed conveyor
- Rockwell PLC controls
- User-friendly operator control panel
- Stepper-driven label dispenser
- Speeds up to 100 cpm

Size of Containers

- Diameter: Min 1/2" (12.7 mm) Max 4" (101.6 mm)
- Height: Min 1" (25.4 mm) Max 8" (203 mm)

Size of Labels

- Length: Min 1/2" (12.7 mm) Max 9" (228.6 mm) with drum wrap-around
- Height: Min 1/2" (12.7 mm) Max 7" (177 mm)
- Roll size: Max 14" (355 mm) with 3" (76 mm) core diameter

Label Position

- Minimum distance from bottom of container to bottom of label 3/16" (5mm)
- Maximum distance from bottom of container to bottom of label 3" (76mm)

Coder Travel Adjustment

(Depending on label configuration)

- Up to 8" (203 mm) with hot stamp coder in vertical position
- Up to 5-1/2" (140 mm) with hot stamp coder in horizontal position (Subject to inspection of samples)

Air & Electrical Requirements

- Air supply: 90 PSIG, less than 0.6 SCFM
- Power Supply: 120 VAC, 1 phase, 60 Hz, 5A

Overall Measurements

- Length: 84" (2.13 m)
- Width: 45" (1.14 m)
- Height: 48" (1.22 m)

Output



- Up to 100 cpm, based on:
 - Bottle size: 100cc 1-7/8" (48 mm) diameter
 - Label length: 5" (127 mm)

Options

- Hot stamp coder
- Extended coder travel:
 - up to 15" (381 mm) with hot stamp coder in vertical position
 - up to 12-1/2" (317 mm) with hot stamp coder in horizontal position
- Overhead belt container stabilizer for square and rectangular containers
- Pneumatic wipers for 2 or 3 panel labeling

Authorized NJM Packaging Sales Representative

Technical Specifications

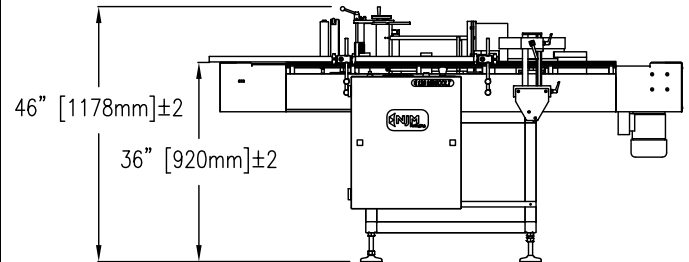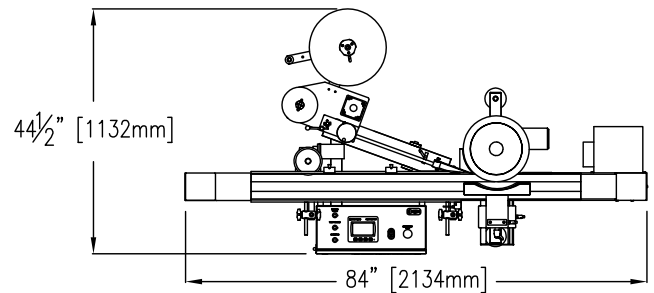

Floor Plan

Dimensions shown are for basic machines and may vary depending on options. In view of our policy of continuing research and product improvement, actual specifications may vary from those shown. Please consult with an NJM Packaging representative regarding your specific requirements.

All NJM Packaging equipment is covered by a one year warranty on parts. A comprehensive nationwide service, parts, and sales support program is available for the life of your equipment. A customized Preventative Maintenance Program for this equipment is also available.

Contact our Customer Service Department at (603) 448-3940 for more information.

This equipment can be purchased separately or as part of a fully integrated packaging line. Contact your sales representative for full details on other packaging equipment and complete turnkey line integration services.

Protected by one or more U.S. and foreign patents.



njmpackaging.com

800-811-6990

USA - Lebanon, NH

CANADA - Montreal, QC